

BC-GARD SL

A SELF - SMOOTHING EPOXY TOPPING

DESCRIPTION:

BC-GARD SL is a Self-smoothing two component epoxy resin floor finish applied at 1mm~2mm. It makes industrial floors dust free, joint less, chemicals resistance, good abrasion resistance glossy finishing and available in a wide range of attractive colors.

PRODUCT FEATURE:

Used for dry process areas where the floor is subjected to trolley, pallet truck and fork lift traffic. Areas applied include laboratories, electronic and clean rooms, automotive assembly, aircraft hangar, pharmaceutical, printing pulp paper, mills, refineries and other industrial plants sectors where chemical resistance are required.

BENEFITS:


- Seamless, monolithic application
- Solvent free, low odor-and V.O.C
- Hygienic, easy to clean
- High chemical resistance to wide range of chemical.
- Abrasion resistant, against medium traffic and trolley movement.
- Hard wearing floors finish
- Wide range of colours
- Complied with BS6920 requirement

COLORS:

- RAL K5 Classic Colour Chart available

FINISHING:

- Gloss

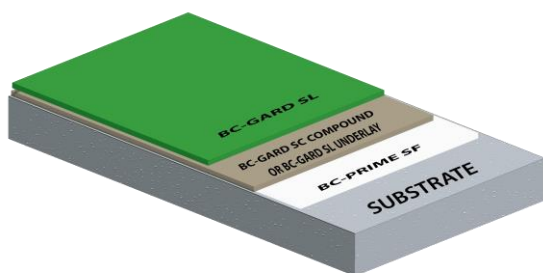

TECHNICAL DATA

| | | | |
|---|---|-------|-------|
| Density (28°C) g/ml ² (mixed) | 1.40±0.05g/ml | | |
| Adhesive strength | >2.0N/mm ² (Concrete failure) | | |
| Tensile strength | 25N/mm ² | | |
| Compressive strength (28 days) | 55N/mm ² | | |
| Flexural strength | 35N/mm ² | | |
| Shore D hardness | 75 ~ 82 | | |
| Temperature Resistance | up to 80°C | | |
| Water Permeability | Nil-Karsten test (impermeable) | | |
| Cytotoxicity (2.4 or less) | below <0.5 | | |
| ASTM D 4060 -10 Taber Abraser | 37mg | | |
| Wear Index in mg/100 revolutions/1kg | | | |
| BS 6920 : Part 1:2000 | <2.39 or less | | |
| Dissolved Oxygen difference (MDOD),mg/L | | | |
| Mixing Ratio by Weight | Part A : Part B 12 : 2 | | |
| Packaging | 14kg | | |
| Pot life (working time) | 30min | | |
| Shelf life & storage (unopened and in good conditions temperature 10°C to 30°C) | 12months | | |
| Material consumption(mixed) | 1.4kg/m ² /mm | | |
| Curing time: | | | |
| | 15°C | 25°C | 32°C |
| Human traffic | 24hrs | 20hrs | 18hrs |
| Light traffic | 36hrs | 30hrs | 24hrs |
| Fully chemicals cure | 10days | 7days | 7days |

BC-GARD SL

A SELF - SMOOTHING EPOXY TOPPING

SUBSTRATE REQUIREMENT & PREPARATION:

Substrate concrete or screed should be a minimum of compressive strength 25N/mm² and adhesive pull-off strength of minimum 1.5N/mm². The substrate should be clean and free from laitance, oil, dust, loose constituents, paint residues, chemicals, algae and other contamination should be removed. The substrate should be dry and free from ground water pressure. If substrate moisture exceeded 4%, apply BC-GARD EM epoxy mortar (compressive strength 60N/mm²) 4-5mm thick or Apply BC-Cem MB 2-3mm thick as a moisture barrier. The substrate must be prepared by vacuum shot blasting, rough contaminations to remove by grinding. Cracks and hollows should be properly remedied. Prepare grooves 3mm wide x 3mm deep at all edges, bay joints columns, doorways and drains for anchoring purpose.

MIXING:

Stir Part A mix for 30 seconds by using a suitable electrical stirrer (with 750 watt High power mixer), then add all of Parts B (Hardener) and mix both liquid parts thoroughly for 2 minute until it fully achieved a homogeneous.

APPLICATION:

- Apply BC-Prime SF @ 0.2kg/m² as a primer for sealing well the substrate porosity.
- Usually within 8-14hours; BC-Prime SF cured, Then only allow to do layering BC-GARD SL. Topping onto the BC-Prime SF Primer.
- Apply BC-GARD SL within the pot life (working time), spread the composite matrix with notched squeegee or pin rake and set it to the correct depth or requirement thickness. Immediately release the air/bubble by using spike roller.

TEMPERATURE CONDITIONS OF APPLICATIONS:

- Do not apply when the relative humidity exceeds 90% on when the surface to be coated is less than 5% above the dew point.
- Do not apply temperatures below 5°C and temperatures above 40°C.

Maintenance and care after cure :

We recommend basic cleaning and maintenance will prolong the life of epoxy floors, clean regularly using a single or double headed rotary scrubber drier in conjunction with alkaline detergent.

Further Information :

Warning and precautions information relating to the safe handling of this product should be found in Material Safety Data Sheet. To be advise to put on suitable clothing and eye-ware for protection purpose. The application area/site must be in good ventilation otherwise advisable to use a portable exhaust fan.

Important Note :

Best Crete product are warranty against defective materials. Due to different substrate and working conditions, no guarantee of an application result or any liability claims. The users are required to have a test ahead based on their intended use.